

Aluzinc

Aluzinc is a special alloy, composed of Zinc (45%) and Aluminum (55%), which guarantees a strong resistance to corrosion.

Our sheets come in corrugated, undulated, and smooth profiles and can come in five pre-painted colors: white, cream, blue, red, and green. Under normal environmental conditions, it can reach 20 years of useful life.

Technical Specifications:


Description (thickness)	Type of Material	Width (ft)	Plates per bundle	Length (ft)	Square feet per unit	Weight per unit	Pound / feet ²
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc	3.45	50	8	27.6	28.43	1.03
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc			10	34.5	35.54	
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc			12	41.4	42.64	
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc			14	48.3	49.75	
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc			16	55.2	56.86	
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc			18	62.1	63.96	
Corrugated Aluzinc (0.55 mm.)	Natural Aluzinc			20	69	71.07	
Metaldeck C-26 (0.50)	Galvanized	3.45	By costumer's request				0.82
Metaldeck C-24 (0.60)	Galvanized		0.94				
Metaldeck C-22 (0.80)	Galvanized		1.39				
Metaldeck C-20 (1.00)	Galvanized		1.63				
Ondulated Aluzinc 8' (0.55 mm.)	Natural Aluzinc green / blue / white	2.66	50	10'	21.28	21.28	1.00
Ondulated Aluzinc				12'	26.6	27.40	
Ondulated Aluzinc				14'	31.92	32.88	
Ondulated Aluzinc				16'	37.24	38.36	
Ondulated Aluzinc				18'	42.56	43.84	
Ondulated Aluzinc				20'	47.88	49.32	
Ondulated Aluzinc				53.2	54.80		
Natural Aluzinc C-26 (0.55 mm.)	Natural Aluzinc	4 x 8	100		32	28.48	0.89
Pre-painted white C-26 (0.55 mm.)	Pre-painted white Aluzinc	4 x 8	By special order		32	28.48	0.89
Pre-painted blue C-26 (0.55 mm.)	Pre-painted Blue Aluzinc	4 x 8	By special order		32	28.48	0.89
Pre-painted green C-26 (0.55 mm.)	Pre-painted Green Aluzinc	4 x 8	By special order		32	28.48	0.89
Pre-painted Red C-26 (0.55 mm.)	Pre-painted Red Aluzinc	4 x 8	By special order		32	28.48	0.89

*We can cut special orders of up to 35 feet in length, upon customer's request.


** Although the width of the corrugated Aluzinc is 3.45', the real useful width is 3.36' because a one of them overlaps when it is being placed.

*** We have in stock undulated Aluzinc with a thickness of 0.45 and 0.55 mm.


Profile of the corrugated

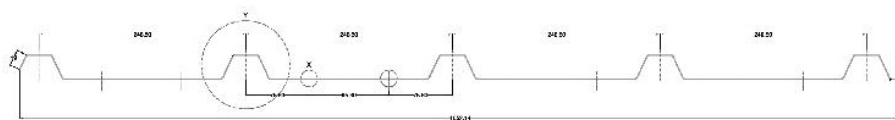

Total width = 1219.2

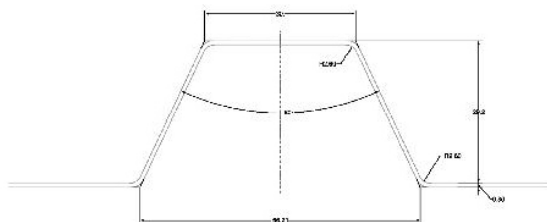

Detail - Y-



Detail - X-

- Length desired by the customer's
- Delivery in 24 hours
- Fulfillment of the ASTM-A-792 standards.

